



Mitchell Laminates

Echo Panel[®] 27



FOR MORE INFORMATION CONTACT

sales@mitchelllaminates.com.au

03 9558 0800



SPECIFICATIONS

Product Name	Echo Panel [®] 27
Designer	Woven Image
Origin	Made in Australia
Colours	7
Composition	100% PET (60% recycled)
Panel Dimensions	2700mm x 1210mm +/- 10%
Weight	1400g/m ² +/- 10%
Thickness	7mm +/- 7%

PERFORMANCE

Colour Fastness to Light	ISO 105-B02-1994 Rating: 6-7 AS 2001.4.21-1970 Rating: 6-7
Fire Test	A3837 Classification: Group 3
Care	Blot excess spills from material quickly. Wipe with a damp cloth. If stain persists, apply small quantities of carpet or upholstery shampoo solution with a damp cloth. Blot well with a clean cloth after each application of the solution. Warning, avoid excessive amounts of water. Ensure adequate ventilation if the product is likely to be subject to excessive moisture.
Sound Absorption	AS ISO 354 - 2006 NRC Value: 0.25 (with no air gap) NRC Value: 0.45 (with 20mm air gap) NRC Value: 0.70 (with 50mm air gap)
VOC Emissions	ASTM D5116 Rate: < 0.02 mg/m ² /hr (7 days)
Environmental	



mitchelllaminates.com.au

01.10.09

Echo Panel ° 27




294




612



560

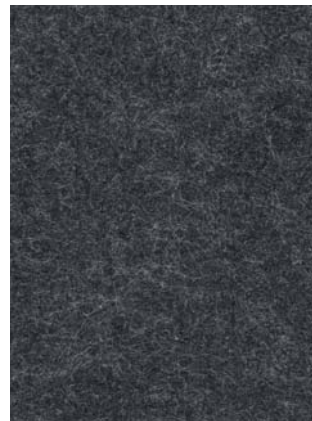

542

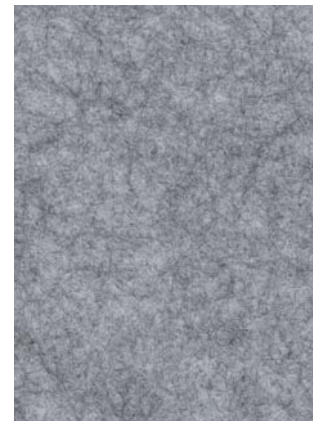

442



909



500

WHAT IS ECHOPANEL ° 27

Echo Panel ° 27 - the latest development in acoustic wall panel from Woven Image.

Echo Panel ° 27 is a finished design surface in itself. At 2700mm x 1210mm, it is engineered for floor to ceiling wall installations to suit standard wall dimensions. Its practical dimensions and ease of application enables maximum material and labour efficiencies.

Echo Panel ° 27 is another landmark from the Echo Panel ° range from Woven Image, demonstrating our ongoing commitment to environmental performance and sustainable interiors.

It is Australian made and designed with full third party environmental accreditation. It has been awarded the Australian Design Award.

ECHOPANEL ° 27 KEY APPLICATIONS

Echo Panel ° 27 is designed for vertical surface applications across commercial office, primary, secondary and tertiary, education, retail, hospitality and government.

For productive and sustainable interiors use Echo Panel ° 27 for:

- Floor to ceiling wall covering
- Pin board surface
- Printable panel for corporate branding and design
- Workstation screens
- Operable walls and partitions

ECHOPANEL ° 27 KEY BENEFITS

A Lighter Product

At 1400 grams per square metre, Echo Panel ° 27 is approximately 20% of the weight of MDF board or Plaster Board in equivalent thickness. It is less labour intensive, being easier to handle and install than product on a roll. Its extreme light weight allows a diverse range of applications.

Improved Acoustics

Echo Panel ° 27 meets the acoustic demands of today's open designed spaces by absorbing sound. It has been tested by RMIT to AS ISO 354-2006. It received noise reduction coefficient (NCR) results of:


NRC Value: 0.25 (with no air gap)

NRC Value: 0.45 (with 20mm air gap)

NRC Value: 0.70 (with 50mm air gap)

These values represent a better than average absorption of sound, particularly useful in open and reverberating spaces. The NRC is a number index for rating how absorptive a material is. In Echo Panel ° 27 with a 20mm air gap, it means that 45% of sound that comes into contact with it is absorbed and 55% of the sound is reflected back into the space, unlike many hard plastics or metals that would have little absorption.

Graph: Sound Absorption Coefficients of Woven Image Echo Panel ° 27 tested with a 20mm air gap

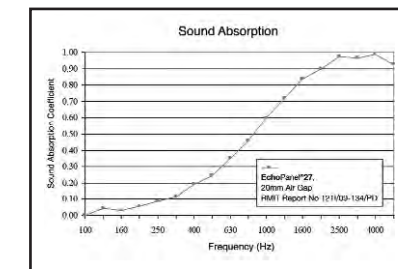

Reduced costs in labour and materials

Wall panel installations utilising Echo Panel ° 27 are uncomplicated and utilise fewer materials compared to traditional wall or screen systems. Instead of upholstering a metal tile or a piece of MDF board, Echo Panel ° 27 is the finished surface removing the cost of covering materials. Also as it is designed for floor to ceiling installation. The resulting system not only uses less material in its production but is also less labour intensive with reduced materials handling.

Environmentally Sustainable

- Echo Panel ° 27 is produced from recycled and recyclable PET (approximately 60% post consumer waste sourced such as recycled PET bottles)
- The base fibre is certified to Oeko-tex Standard 100 for meeting human ecological requirements. Certified by TESTex Zurich, Swiss Textile Institute
- Echo Panel ° 27 is certified to carry the Good Environmental Choice Australia label
- Echo Panel ° 27 can secure maximum credits under the Eco Preferred Content category in Green Star rating tools as administered by the Green Building Council of Australia
- As Echo Panel ° 27 is the finished surface in itself, dematerialisation becomes easy; through the elimination of the older combined fabric and wood wall panel, screens, and partitions systems
- The Woven Image Product Stewardship Program will guarantee to coordinate the recovery, reuse or recycling of uncontaminated Echo Panel ° 27 from disassembled wall panels and other commercial applications. Woven Image will also coordinate the collection and recycling of factory off cuts

Ideal Print Surface

Echo Panel ° 27 is an ideal base to print on, utilising the latest in inkjet and screen printing technology. Perfect for signage and full colour images, Echo Panel ° 27 can be used both as individually printed panels or multi-panel displays.

Easy Application: Flexible Fixing, Cutting and Machining

Echo Panel ° 27 can be cut in a variety of ways including traditional workshop tools such as a band saw, panel saw, circular saw, jig saw, router, die cutter or even using manual techniques such as guillotining or cutting with an art knife.

Echo Panel ° 27 can be fixed by nail, screw or glue.

For full Echo Panel ° 27 application guide please visit: wovenimage.com